

# 135° Flush Elbow


2" OD

Angled elbow fitting to connect tubing at 135° angles without bends or miters.



Angled elbow fitting for connecting bar rail around oblique corners.

## Standard Finishes

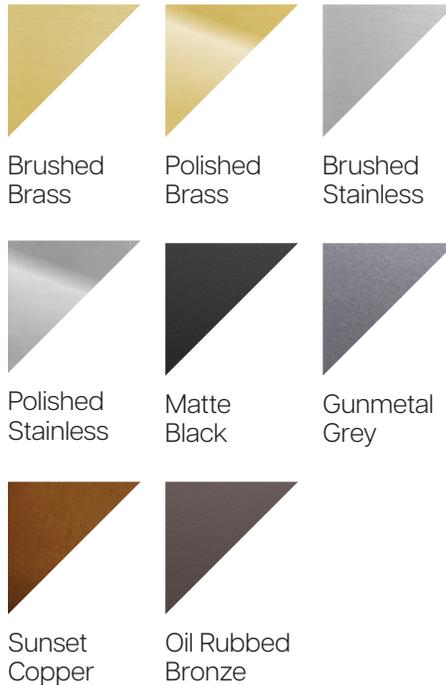


*Custom finishing is available upon request.*



Elbow fitting slides into tubing for a straight flush look.

## Dimensions

(W <sub>1</sub> )	Width 1	2.54"
(W <sub>2</sub> )	Width 2	2.54"
(D <sub>1</sub> )	Diameter 1	2.00"
(D <sub>2</sub> )	Diameter 2	1.90"

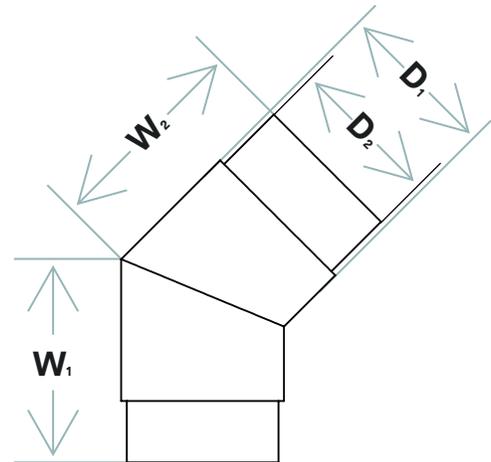

## Installation

1. Completely secure the first section of bar rail tubing to the bar face or wall.
2. Insert elbow fitting into the end of the secured section of tubing.
3. Connect the second piece of tubing to the elbow fitting before securing to bar.
4. Secure the second section of bar rail tubing to bar face.

## Complete The System


Make sure to get all the necessary components to complete your bar rail system.



Tubing



End Caps



Brackets



Flanges

Care and maintenance varies by finish. Given the nature of the product, typical wear and tear may be noticed with your bar rail over time, such as scuffs, scratches, and dirt.

Visit [Kegworks.com/care-guide](https://www.kegworks.com/care-guide) to read our guide on how to properly prep, clean, and maintain all bar rail finishes.